


TrueNet®

CopperTen™ Unshielded Cable

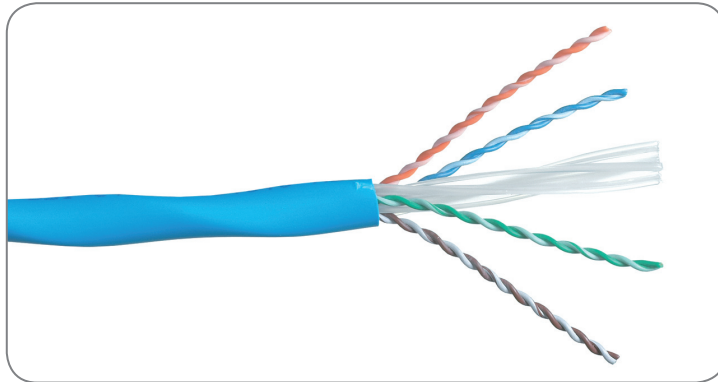

TECHNICAL DATA

The TrueNet® Category 6_A Solution CopperTen™ supports 10 Gigabit Ethernet over unshielded Copper to a full 100m up to 500 MHz.

At high frequencies unshielded cabling systems are hindered by the technical combination of insertion loss and alien crosstalk (interference from adjacent cables). This can greatly disrupt transmission and high speed data communications.

The CopperTen™ cable utilises patented designs and manufacturing processes that enable the products to overcome these challenges.

The most noticeable difference when compared to Gigabit cables is the star filler which is now elliptical and offset. The filler keeps distance between not only pairs within the cable but also with the pairs in adjacent cables. The cable ellipse rotates along its length, creating a larger air footprint. The distance between all pairs is now maintained removing alien crosstalk.

CopperTen™ cable is available as standard in a blue Low Smoke Zero Halogen sheath.

Features

- Patented technology to minimise the effects of alien crosstalk and insertion loss
- Supports 10 Gigabit Ethernet over unshielded copper to a full 100m up to 500MHz
- Fully interoperable and backwards compatible with component compliant Category 5e / Class D and Category 6 / Class E systems
- Third party certification

Benefits

- A lower cost route to achieve 10 Gigabit performance in the Enterprise Network
- Maximises productivity levels with 10 times the data throughput
- Minimum network latency
- True future proofing for tomorrow's network applications
- Covered by the TrueNet® System Warranty*



Ordering Information

Description	Catalogue number
305m CopperTen™ blue LSZH reel	10G-A6TZ1-BLM2

Other cable types and colours are available subject to availability. Please contact TE/ADC KRONE Customer Services for details.

Electrical Data

DC Resistance at 20°C (max)	9.38Ω / 100m
DC Resistance Unbalanced (max)	2%
Mutual Capacitance at 20°C (max)	5.6nF / 100m
Operating Voltage (max)	300 V DC
Worse Case Cable Skew	40 ns / 100m
Nominal Velocity of Propagation	65%

Construction

Conductor	23 AWG solid bare copper
Insulation	100% Polyolefin
Separator	100% Polyolefin
Jacket	Low Smoke Zero Halogen
Nominal Outside Diameter	7.62mm - 6.5mm x 8.4mm

Environmental

Transport and Storage	-20° to 75°C
Installation	4° to 50°C
Operation	-20° to 75°C

Compliances

Flammability	IEC 60332-1
Smoke Density	IEC 61034
Acid Gas	IEC 60754-1
pH	IEC 60754-2
Fire Load	828 KJ/m (.23 kWh/m)
Category 6 _A Horizontal Cable Requirements	ISO/IEC 11801:2002 Amendment 1 for Channel compliance ISO/IEC 11801:2002 Amendment 2 (draft) for perm link and component compliance TIA-568-B.2-10 for channel, permanent link and component compliance

*Terms & conditions apply

TECHNICAL DATA

Tyco Electronics Ltd.
Rheinstrasse 20
CH-8200 Schaffhausen
Switzerland
Tel: +41 (0)52 633 66 61

www.tycoelectronics.com

Tyco Electronics
All rights reserved
101738BE 2/11 Revision © 2011

ADC KRONE, TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors.

While Tyco Electronics has made every reasonable effort to ensure the accuracy of the information in this document, Tyco Electronics does not guarantee that it is error-free, nor does Tyco Electronics make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. Tyco Electronics reserves the right to make any adjustments to the information contained herein at any time without notice. Tyco Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult Tyco Electronics for the latest dimensions and design specifications.