


TrueNet®

HK STP Outlets 50x50 European Style

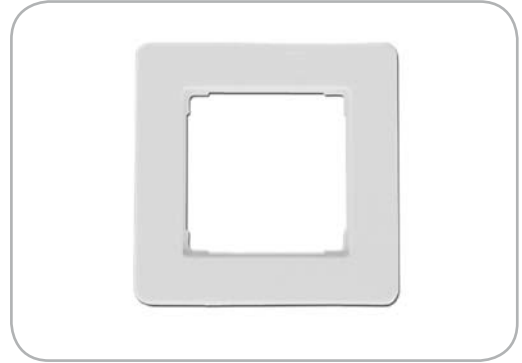

The European style 50x50 faceplates feature the component compliant modular HK jack for LAN cabling systems satisfying Category 5e requirements.

Dimensions

Single: 80 high x 80 wide x 24mm deep

Test Specification

Exceeds specifications according to ISO/IEC 11801:2002, EN 50173-1:2002 and TIA/EIA 568-B

Features

- Performance exceeding Category 5e specifications up to 100MHz
- Double STP variant
- Modular construction ensures swift installation
- The 50x50 backplate allows universal installation in trunking systems

TECHNICAL DATA



www.adckrone.com • Technical Assistance Centre: +32 2 712 6542 • euro.tac@adckrone.com

Freephone (UK only): 0800 960236

Ordering Information

Description	Catalogue Number
Loaded Faceplate, Category 5e STP, 2 Port, Pure White	6690 1 593-51
Loaded Faceplate, Category 5e STP, 2 Port, Ivory	6690 1 593-02
Loaded Faceplate, Category 5e STP, 1 Port, Pure White	6690 1 593-61
Loaded Faceplate, Category 5e STP, 1 Port, Ivory	6690 1 593-12
Cover Frame to adapt outer dimensions of 50x50 outlet to 80x80, Pure White	6690 1 725-01
Cover Frame to adapt outer dimensions of 50x50 outlet to 80x80, Ivory	6690 1 725-00
Back Box, Single Gang Ivory	6690 1 525-02
Back Box, Single Gang Pure White	6690 1 525-03

Electrical data

Insulation resistance	≥ 500 MΩ	(IEC 512-2-3a)
Dielectric strength	1.0 kV	(IEC 512-2-4a)

Terminations

Typ. termination resistance	≤ 20 mΩ	(EN 60603-7)
Current carrying capacity	≤ 1.3 A	(EN 60950)
Insertion cycles	≤ 750	(IEC 512-2-13b)

Mechanical data

Conductor diameter	0.4 - 0.65 mm (AWG 26-22)
Insulation diameter	0.7 - 1.4 mm (up to 1.7 mm with PE insulation)
Re-terminations of LSA-PLUS® contacts	≤ 50
Wire insertion/withdraw force	~ 30N/20N

Transmission data

Compliant with	ISO/IEC 11801:2002 EN 50173-1:2002 TIA/EIA 568-B
----------------	--

Environmental

40/70/21 according to EN 60603-7
with test according to IEC 512 (11a, 11i, 11j, 11m).

TECHNICAL DATA



Web Site: www.adckrone.com

ADC Communications (UK) Limited. Runnings Road, Kingsditch Trading Estate, Cheltenham, Gloucestershire, GL51 9NQ United Kingdom • Phone: +44 (0) 1242 264 400 Fax: +44 (0) 1242 264 488
contactuk@adckrone.com

EMEA Headquarters:

ADC GmbH, Beeskowdamm, 3-11, 14167 Berlin, Germany • Phone: +49 308 453 1818 Fax: +49 30 8453-1703. For a listing of all ADC KRONE's global sales office locations, please refer to our web site.

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC KRONE reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ADC GmbH headquarters in Berlin. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents.

Part Number 200329BE Apr. 06 Original © 2008 ADC Communications (UK) Ltd. All Rights Reserved